



Dimmable LED Drivers—LKAD017D-T

領冠電源



产品参数/Specification

—产品特性/Feature—

- 200~240VAC(50/60Hz)输入/ 200~240VAC(50/60Hz) Input
- 隔离方案,前切(或后切)/电子式,可控硅调光,调光非常流畅/Isolated, leading (or trailing)/MOS triac dimming, dimming much smoothly;
- 高效率、高功率因素,稳定性好/ High efficiency, hight PF, good steady;
- 短路保护,过流保护,过压保护,过温保护/ Short circuit, over voltage, over current and over temperature protection;
- 100%满载老化测试/ 100% full load burn-in test;
- 兼容市面上绝大部分调光控制系统(98%以上)。 Compatible with most dimming control systems on the market
- 独立外置, Class II恒流类型/ independent, Class II constant current type;
- 防护等级 IP20/ degree of protection IP20;
- 采用自主知识产权单片机控制方案,可以做到0.1%调光解晰度/ By adopting the control scheme of single chip microcomputer with independent intellectual property rights, 0.1% dimming resolution can be achieved
- lighting, ceiling light, down light and panel light;
- 3年质保期/ 3 years warranty.

Model	LKAD017D-T	
输入 Input	输入电压范围/Input Voltage range	100~132V
	频率/Frequency	50/60hz
	谐波/THD	≤15%
	功率因数/Power factor	0.95/120VAC
	输入电流 Input current (mA)	70mA
	待机功耗 stand_by power	0.5W
	浪涌电流 Inrush Current (Max.)	≤15A@120VAC
输出 Output	漏电流 Leakage Current	<1mA/120V
	额定电压/Rated voltage	40V
	空载电压/No-load Voltage	40V
	工作电压范围/working voltage range	20~40V
	可选择电流规格/selectable current	200~300MA
	电流精度/Current precision	(+/-)3%
	额定功率/Rated power	12W
	开机延时/Setup Time	≤0.5s/230VAC
	输出线性调整率Output Line Regulation	±5%
	温度漂移temperature drift	±10%

保护特性 Protection	开路保护Output open circuit protection	有/Enable	
	短路保护Short Circuit Protection	打嗝模式/Hiccup mode	
使用环境 Environment Requirements	工作温度/湿度要求 Operating Temp. /RH	-30~+45°C/20~95%	
	储存温度, 湿度要求 Storage Temp. /RH	-40~+80°C/10~95%	
安全和电磁兼容 Safety & EMC	认证编号/Certificate	符合CE/ meet CE	
	耐压 withstand voltage	3750MA/60S	
	绝缘阻抗insulation resistance	500V>100M	
	浪涌等级EMS immunity	IEC6100-4-5 (L-N:1KV)	
	安规标准Safety standard	EN61347, GB19510	
	电磁干扰electromagnetic interference		
其他 Others	电磁抗干扰Electromagnetic Susceptibility		
	IP等级说明 IP level description	IP20	
	质保说明Warranty instructions	3年/3 years	
	尺寸/Size	126*51*10MM	
注意事项 matters needing attention	重量/Net weight	125g	
	1. 建议客户在灯具供电回路中安装过欠压保护与浪涌保护装置, 以确保用电安全 1. pls suggest the client to install the undervoltage protection device and surge protection device to ensure Electricity safety 2. 电源作为整灯灯具中的一个零部件与终端设备结合使用, 因EMC性能受LED灯具及走线的影响, 终端设备制造商需对整套装置重新进行EMC确认。 2. The power supply is considered a component which will be installed a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 3. 客户在使用电源时, 注意电源通风散热和环境温度, 超过TA时要做降额使用 3. Be careful of ambient temperature and heat dissipation during the client use this unit, When exceeding TA, the power supply shall be derated		

测试数据/Test data


输入电压 Input voltage (Vac)	输入电流 Input current (mA)	输入功率 Input power (W)	功率因数 PF	输出电压 Output voltage (Vdc)	输出电流 Output current (mA)	输出功率 Output Power (W)	转换效率 Efficiency (%)
240V	60.54	13.65	0.943	40.00	286	14.24	104.3%
	48.97	10.71	0.916	30.00	295	12.53	117.0%
	37.38	7.67	0.859	20.00	306	6.55	85.4%
200V	69.93	13.69	0.964	40.00	288	14.12	103.1%
	55.68	10.72	0.947	30.00	303	12.39	115.6%
	41.24	7.64	0.911	20.00	309	6.50	85.1%

调光测试效果 Dimming effect

(负载50V测试/Test load voltage 50V)

编号 NO	调光器型号 Dimmer Type	最小电流 Min current	最大电流 Max current(mA)	调光比 Dimming ratio	调光效果 Dimming effect
1	KEEY 220V~	22MA	276MA	8-100%	OK
2	EUPCHIPS 500W 105EI	40MA	293MA	14-100%	NO
3	TENGEN				
4	T & J 630W	25MA	269MA	10-100%	OK
5	snaider 15-450W	26MA	271MA	10-100%	OK
6	T & J 1000W	12MA	277MA	5-100%	OK
7	Midea 630W	0MA	290MA	0-100%	NO
8	CHINT 500W				
9	JUNON	8MA	291MA	3-100%	OK
10	UK-PRD400VA 150W	0MA	280MA	0-100%	OK
11	LTECH 300W	51MA	261MA	20-100%	OK
12	LINKUN 300W				

产品尺寸图/ Product Size Diagram

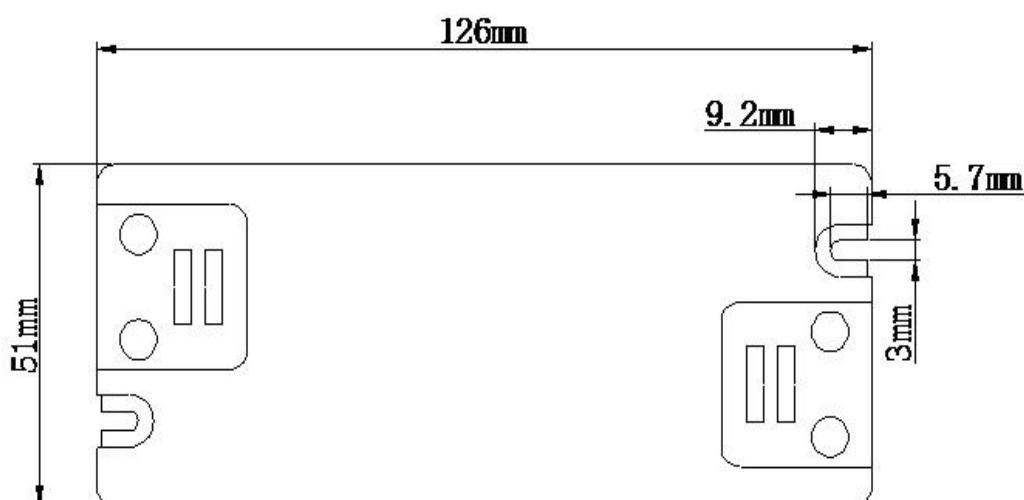

产品接线示意图/ Product Connection Diagram



备注/Note:

"1. 所有没提及到的参数都是在120V输入，额定负载和在周围温度为25°C的情况下测试的；

All parameters NOT specially mentioned are measured at 120VAC input, rated load and 25 of ambient temperature;

2.注意接线的方向，不要搞反输入和输出端。

Pay attention to the direction of wiring, do not reverse the input and output terminals.

广东领冠智能科技有限公司

Guangdong Linkuan Smart Tech Co.,Ltd.

地 址：广东省东莞市万江区大莲塘工业区3号

Address: NO.3 Building, Dalian tang Industrial Park,
Wanjiang

District, Dongguan, Guangdong, China

Tel:+86-769-23129651

Fax:+86-23129652