



# 0V Dimmable LED Drivers—LKAD082D

## —产品特性/Feature—

- 200-240VAC (50/60Hz) 输入 / 200-240VAC (50/60Hz) Input
- 隔离高PF无频闪方案,。采用最新的调光信号与主输出的隔离调光认证方案 No stroboscopic scheme for high PF isolation, . Using the latest dimming signal and main output isolation dimming certification scheme
- 高效率、高功率因素, 高稳定性, 高调光比 High efficiency, high power factor, high stability, high light ratio
- 短路保护, 过流保护, 过压保护, 过温保护 / Short circuit, over voltage, over current and over temperature protection;
- 独立外置, Class II 恒流类型 / independent, Class II constant current type;
- 防护等级 IP65 / degree of protection IP65;
- 实现了真正的0-10V调光, 全程无频闪, 兼容市场上所有的调光控制系统。 It realizes true 0-10V dimming, no flicker in the whole process, and is compatible with all dimming control systems in the market.
- 3年质保期 / 3 years warranty.



## 产品参数/Specification

Model		LKAD082D-C	备注
输入 Input	输入电压范围/Input Voltage range	200-240V	
	频率/Frequency	50/60hz	
	谐波/THD	≤15%	
	功率因数/Power factor	0.95/240VAC	
	输入电流 Input current (mA)	500MA/200VAC	
	待机功耗 stand_by power	≤0.8W	
	浪涌电流 Inrush Current (Max.)	≤30A@240VAC	
	漏电流 Leakage Current	<1MA/240VAC	
输出 Output	额定电压/Rated voltage	40V	
	空载电压/No-load Voltage	46V	
	工作电压范围/working voltage range	10-42V	
	额定电流规格/Rated current specification	2100MA	
	电流精度/Current precision	(+/-) 3%	
	额定功率/Rated power	84W	
	开机延时/Setup Time	≤0.5s/230VAC	
	输出线性调整率Output Line Regulation	±5%	
	温度漂移temperature drift	±10%	


保护特性	开路保护Output open circuit p	有/Enable	
	短路保护Short Circuit Protect	打嗝模式/Hiccup mode	
使用环境 Environment Requirement	工作温度/湿度要求 Operating Temp./RH	-30~+45°C/20~95%	
	储存温度,湿度要求 Storage Temp./RH	-40~+80°C/10~95%	
安全和电磁 兼容 Safety & EMC	认证编号/Certificate	E478938	
	耐压 withstand voltage	1500Vac/60S	
	绝缘阻抗insulation resistance	500V>100M	
	浪涌等级EMS immunity	IEC6100-4-5(L-N:1KV)	
	安规标准Safety standard	IEC61347-2-13 EN61	
	电磁干扰electromagnetic inter	EN55015	
	电磁抗干扰Electromagnetic Sus	EN61000-4-2. 3. 4. 5. 6. 8. 11. EN61547	
其他 Others	IP等级说明 IP level descripti	IP20	
	质保说明Warranty instructions	3年/3 years	
	尺寸/Size	355*30*21MM	
	重量/Netweight		
注意事项 matters needing attention	<p>1. 建议客户在灯具供电回路中安装过欠压保护与浪涌保护装置, 以确保用电安全 1.pls suggest the client to instal the unde voltage protection device and surge protection device to ensure Electricity safety</p> <p>2. 电源作为整灯灯具中的一个零部件与终端设备结合使用, 因EMC性能受LED灯具及走线的影响, 终端设备制造商需对整套装置重新进行EMC确认。 2.The power supply is considered a component which will be installed a final equipment.The final equipment must be re-confirmed that it still meets EMC directives.</p> <p>3. 客户在使用电源时, 注意电源通风散热和环境温度, 超过TA时要做降额使用 3.Becareful of ambient temperature and heat dissipation during the client use this unit, When exceeding TA, the power supply shall be derated</p>		

### 测试数据/Test data


输入电压 Input voltage ( Vac)	输入电流 Input current ( mA)	输入功率 Input power ( W)	功率因数 PF	输出电压 Output voltage ( Vdc)	输出电流 Output current ( mA)	输出功率 Output Power ( W )	转换效率 Efficiency (%)
240V	394.10	91.17	0.968	40.00	2010.00	80.40	88%
	301.80	69.49	0.968	30.00	2020.00	60.60	87%
	210.40	47.57	0.948	20.00	2024.00	40.48	85%
	120.40	24.99	0.868	10.00	1979.00	19.79	79%
200V	461.90	90.25	0.976	40.00	1977.00	79.08	88%
	352.50	68.85	0.976	30.00	1995.00	59.85	87%
	242.90	47.11	0.969	20.00	2004.00	40.08	85%
	134.40	24.83	0.924	10.00	1976.00	19.76	80%

## 调光测试数据Dimming test data


输入电压 Input voltage ( Vac)	输入电流 Input current ( mA)	输入功率 Input power ( W)	功率因数 PF	输出电压 Output voltage ( Vdc)	输出电流 Output current ( A)	输出功率 Output Power ( W)	调光电压 Dimming voltage ( V)	百分比	
240V	16.77	0.36	0.086	38.000	0.00	0.36	0V	0.00%	0
240V	17.20	0.51	0.122	38.000	1.00	0.51	0.32V	0.05%	1
240V	22.70	1.72	0.312	38.000	24.00	1.72	0.5V	1.20%	2
240V	31.72	3.26	0.426	38.000	58.00	3.26	0.7V	2.91%	3
240V	48.17	5.72	0.486	38.000	115.00	5.72	1V	5.76%	4
240V	126.50	14.62	0.476	38.000	323.00	14.62	2V	16.18%	5
240V	116.50	24.12	0.854	38.000	553.00	24.12	3V	27.71%	6
240V	152.40	33.53	0.909	38.000	780.00	33.53	4V	39.08%	7
240V	190.90	43.06	0.935	38.000	1005.00	43.06	5V	50.35%	8
240V	230.60	53.06	0.951	38.000	1239.00	53.06	6V	62.07%	9
240V	270.60	62.87	0.960	38.000	1465.00	62.87	7V	73.40%	10
240V	311.80	72.86	0.966	38.000	1693.00	72.86	8V	84.82%	11
240V	350.10	81.92	0.967	38.000	1897.00	81.92	9V	95.04%	12
240V	<b>367.8</b>	<b>86.12</b>	<b>0.968</b>	38.000	<b>1996</b>	86.12	10V	100.00%	13

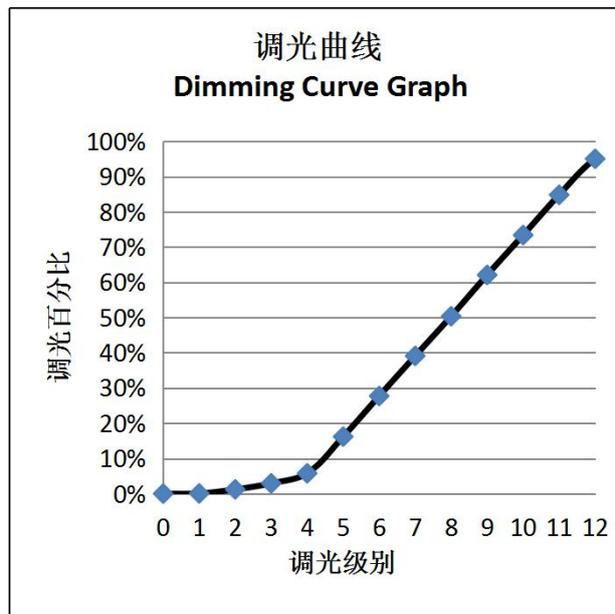

## 产品尺寸图/ Product Size Diagram

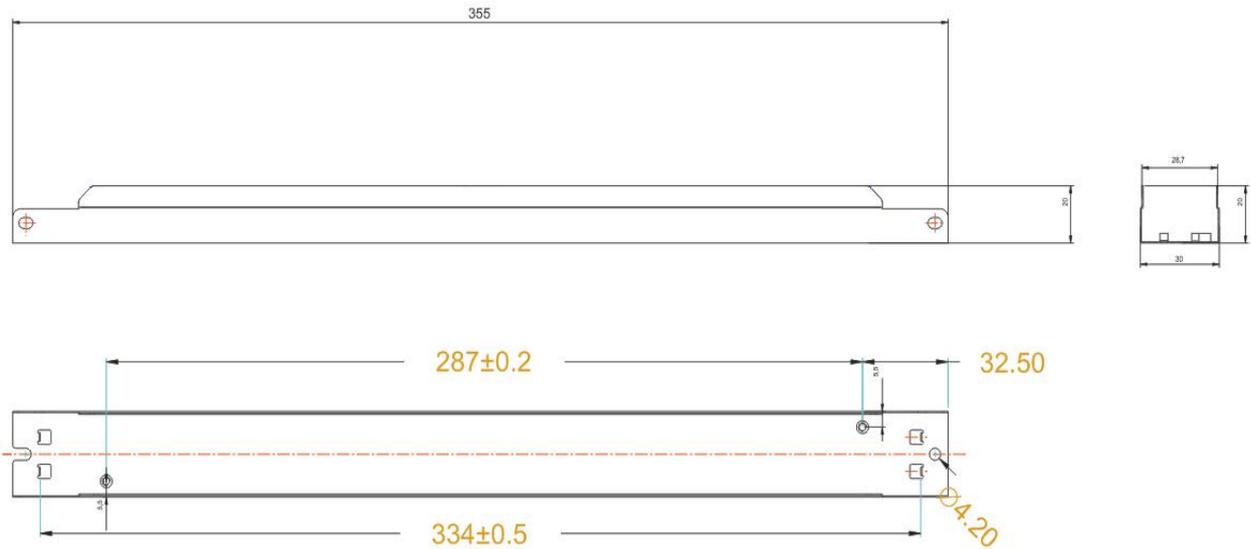

## 产品接线示意图/ Product Connection Diagram

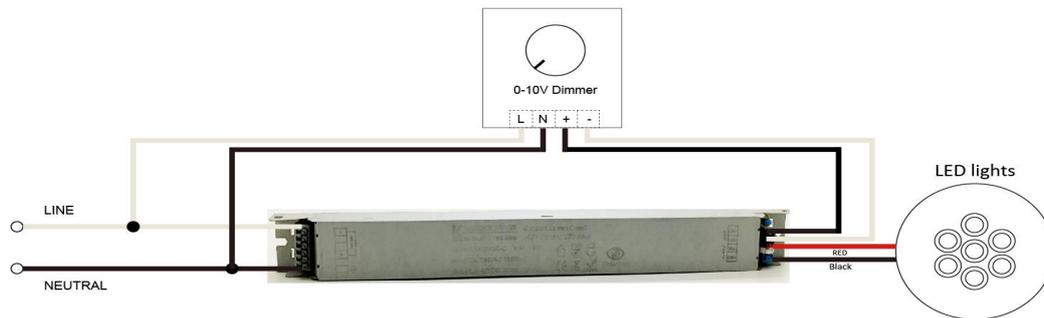

## 备注/Note:

"1. 所有没提及到的参数都是在230V输入，额定负载和在周围温度为25°C的情况下测试的；  
All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 of ambient temperature;

2. 注意接线的方向，不要搞反输入和输出端，  
Pay attention to the direction of wiring, do not reverse the input and output terminals,

# 广东领冠智能科技有限公司

Dongguan Linkuan Semiconductor Lighting Co.,Ltd

地 址：广东省东莞市万江区大莲塘工业区3号  
Address: NO.3 Building, Daliantang Industrial Park,  
Wanjiang  
District,Dongguan,Guangdong,China  
Tel:+86-769-23129651 Fax:+86-23129652